

CaviBlaster 2040-ROV-M2

Remote Operated Vehicle, 20 gpm & 4,000 psi, Model 2


Specifications and Options

A compact and powerful submersible hydraulically driven cleaning system compatible with a wide range of Work Class ROVs .

Accessories Included:

Full forward thrust lance.

This Hydraulic Power Unit must be capable of operating the water pressure pump at 1160 rpm and 55 hp. Consult us about the suitability of your existing Hydraulic power unit.

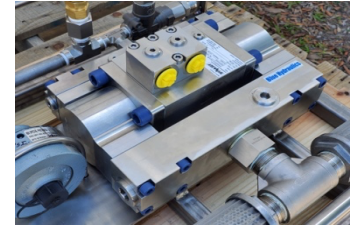

SKID Dimensions	
Length	22" / 56 cm
Width	20" / 51 cm
Height	10" / 25 cm
Weight	140 Lbs / 63 kg


Drive System	
HP Oil Flow Rate	33 gpm / 125 L/m
HP Oil Pressure Rate	3000 psi / 206 BAR
Hose Diameter	1/2" @ 10 Lft / 3 m

Ideal For
Deep Water Operations
OffShore Oil & Gas Projects

Pump System	
Pressure Pump	Dynaset HPW 320/75-125-SUB
Pump Type	HPW Integrated with HPU
Manifold Material	Stainless Steel
HP Water Flow Rate	Constant 20 GPM / 76 L/m
Nozzle Pressure	4000 PSI / 275 BAR

Shipping Dimensions	
Pallet 28x24x16"	180 Lbs / 82kg Gross weight

Tool
Unbalanced ROV Lance

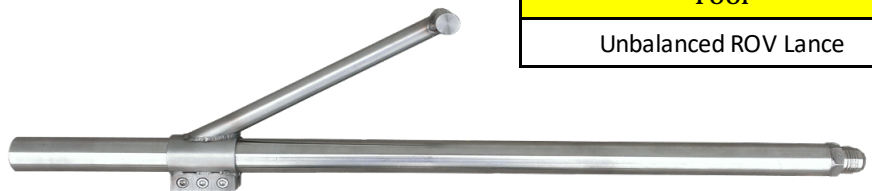

* Pricing and specifications subject to change without notice